


# FAWLCUC01

Base Product

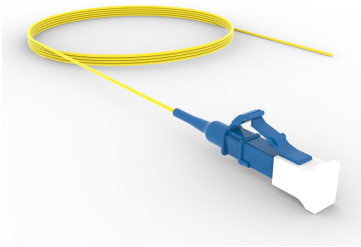

TeraSPEED® LC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm Tight Buffer

## Product Classification

|                       |                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------|
| Regional Availability | Asia   Australia/New Zealand   China   Europe   India   Latin America   Middle East/Africa   North America |
| Portfolio             | CommScope®                                                                                                 |
| Product Type          | Fiber pigtail, unjacketed                                                                                  |
| Product Brand         | SYSTIMAX InstaPATCH® 360                                                                                   |
| Product Series        | FAW                                                                                                        |
| Ordering Note         | Minimum length may vary based on cable configuration                                                       |

## General Specifications


|                        |        |
|------------------------|--------|
| Color, boot A          | Blue   |
| Color, connector A     | Blue   |
| Interface, Connector A | LC/UPC |
| Jacket Color           | Yellow |
| Total Fibers, quantity | 1      |

## Dimensions

|                                  |        |
|----------------------------------|--------|
| Cable Assembly Length Range (m)  | 1 – 20 |
| Cable Assembly Length Range (ft) | 1 – 66 |

## Ordering Tree

# FAWLCUC01

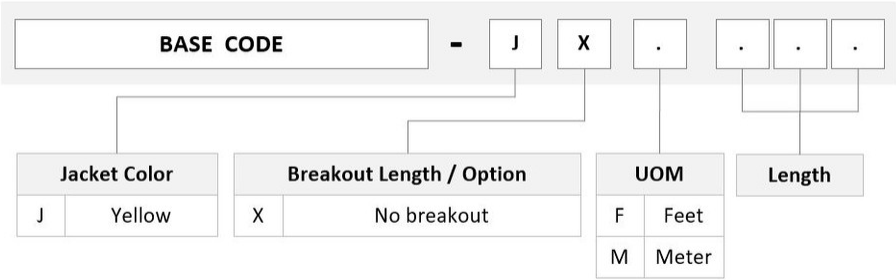

## Mechanical Specifications

**Cable Retention Strength, maximum** 1.00 lb @ 0 ° | 1.00 lb @ 90 °

## Optical Specifications

**Fiber Mode** Singlemode

**Fiber Type** G.652.D | G.657.A1, TeraSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

**Environmental Space** Unrated

## Packaging and Weights

**Packaging quantity** 2

## Regulatory Compliance/Certifications

| Agency        | Classification                                                                                                                 |
|---------------|--------------------------------------------------------------------------------------------------------------------------------|
| ANATEL        | Compliant                                                                                                                      |
| CHINA-ROHS    | Below maximum concentration value                                                                                              |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system                                                 |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant                                                                                                                      |
| UK-ROHS       | Compliant                                                                                                                      |



## Included Products

# FAWLCUC01

---

- 760038570 – TeraSPEED® 900µm Tight Buffered Fiber
- X-TB-8W-YL-F/G
- 860657283 – LC/UPC Connector, Singlemode, Blue